



**MAXIMIZER**

# MOPPING BEST PRACTICES

## PREPARATION AND SETUP

- Wear proper personal protective equipment, gloves, and eye protection (as recommended by chemical's MSDS) while dispensing chemical.
- Fill the WaveBrake® Mop Bucket with diluted floor cleaning solution as recommended per chemical-specified guidelines.
- Attach a clean Maximizer Mop head to the handle. The Maximizer Mop will work with an Invader or Gripper handle.
- Dip the Maximizer Mop head into the diluted cleaning solution toward the front of the WaveBrake® Mop Bucket until it is saturated.


## DUST MOPPING

- Inspect area to be cleaned. Remove movable items such as trash cans and light furniture.
- Dust mop or sweep area to remove all debris, dirt, and large objects from the mopping area.

## MOPPING PROCESS

- Place safety signs on outer edge of area to be mopped.
- Move the mop head to the wringer, twist mop 1-2 times, and wring out the mop by pressing the handle of the wringer down.
- Repeat as necessary to dampen the mop until the mop head does not drip when raised from the wringer.
- Create an area to mop inside. Place the Maximizer Mop on the floor and frame out or create a comfortable work area with the mop, typically a 10' x 10' area.
- After framing, return to the farthest point from the exit. For best results, mop in a figure 8 motion while moving backwards. Fill in the box and repeat until entire area is cleaned. See Figure 1 for proper figure 8 motion.
- Frame out the next farthest box from your planned exit point and repeat the figure 8 pattern.
- Move safety signs as sections of the floor become dry and keep them on the front edge of any wet floor space.
- Repeat mopping process as necessary until the desired floor space is clean.

Figure 1

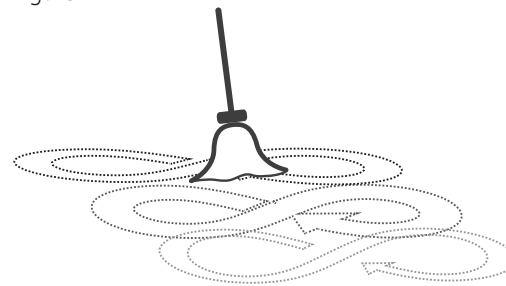

## CHANGING CLEANING SOLUTION

- Return the WaveBrake® Mop Bucket to the mop sink.
- Wring out the mop by pressing the handle of the wringer down.
- Remove the used mop head from the handle and take to onsite laundering facility for laundering and re-use. Replace with a clean Maximizer Mop.
- Remove wringer from WaveBrake® Mop Bucket and rinse it with clean water.
- Empty remaining contents of the mop bucket into the mop sink and rinse with clean water.
- Replace the wringer at the back of the mop bucket.
- Fill the WaveBrake® Mop Bucket with new diluted floor cleaning solution as recommended per chemical-specified guidelines.

## CLEANUP PROCESS

- Return WaveBrake® Mop Bucket to mop sink.
- Remove Maximizer Mop and return to laundry facility for laundering and re-use.
- Remove wringer and rinse with clean water.
- Empty WaveBrake® Mop Bucket and rinse with clean water.
- Replace the wringer at the back of mop bucket.
- Return mop bucket and mop handle to storage.
- Once floor is thoroughly dried, remove safety signs and return to storage.